




UNC Threaded Rods ASME B18. 31. 3

Flexible usage threaded bar or rod to ASME B18. 31. 3.

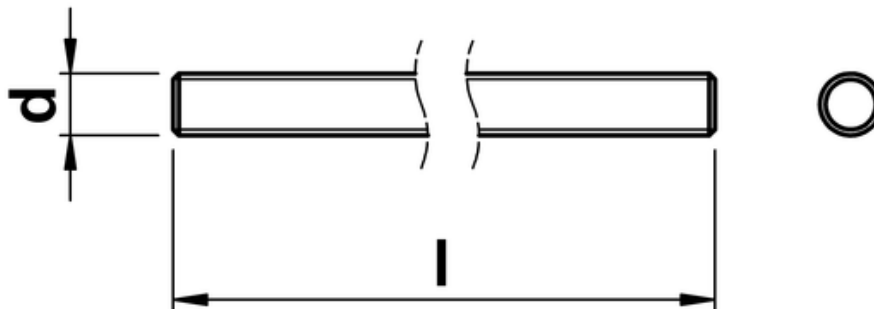

| d | tpi |
|-------|-----|
| 2-56 | 56 |
| 3-48 | 48 |
| 4-40 | 40 |
| 5-40 | 40 |
| 6-32 | 32 |
| 8-32 | 32 |
| 10-24 | 24 |
| 12-24 | 24 |
| 1/4 | 20 |
| 5/16 | 18 |
| 3/8 | 16 |
| 7/16 | 14 |
| 1/2 | 13 |
| 9/16 | 12 |
| 5/8 | 11 |
| 3/4 | 10 |
| 7/8 | 9 |
| 1 | 8 |
| 1 1/8 | 7 |
| 1 1/4 | 7 |

| d | tpi |
|--------------|--------------|
| 1 3/8 | 6 |
| 1 1/2 | 6 |
| 1 3/4 | 5 |
| 2 | 4-1/2 |