




Half Nuts (Lock Nut) Fine Pitch ISO 4035

Nut conforming to DIN 439 but with Fine Thread Pitch. Also known as a half nut, thin nut, or jam/lock nut. Typically fitted with a spanner or ratchet with socket, often used in pairs in a nut locking arrangement. A popular nut type, with a more unusual Fine Thread Pitch for when more thread engagement is required. Must be used in conjunction with the appropriate Fine Thread Pitch bolts or screws.

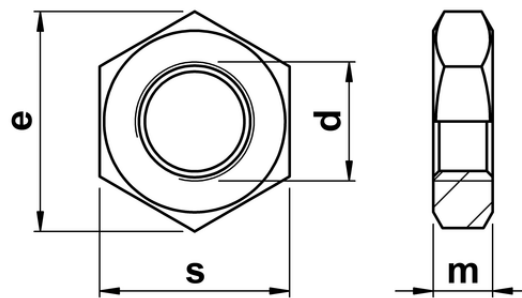

d	thread pitch	m min.	s	e
M8X0.75	0.75	3.70	13	14.38
M8X1	1.00	3.70	13	14.38
M10X1	1.00	4.70	17	18.90
M10X1.25	1.25	4.70	17	18.90
M12X1	1.00	5.70	19	21.10
M12X1.25	1.25	5.70	19	21.10
M12X1.5	1.50	5.70	19	21.10
M14X1.5	1.50	6.42	22	24.49
M16X1	1.00	7.42	24	26.75
M16X1.5	1.50	7.42	24	26.75
M18X1.5	1.50	8.42	27	29.56
M20X1.5	1.50	9.10	30	32.95
M20X2	2.00	9.10	30	32.95
M22X1.5	1.50	9.90	32	35.03
M24X1.5	1.50	10.90	36	39.55
M24X2	2.00	10.90	36	39.55
M27X1.5	1.50	12.40	41	45.20

d	thread pitch	m min.	s	e
M27X2	2.00	12.40	41	45.20
M30X1.5	1.50	13.90	46	50.85
M30X2	2.00	13.90	46	50.85
M33X1.5	1.50	15.40	50	55.37
M33X2	2.00	15.40	50	55.37
M36X1.5	1.50	16.90	55	60.79