




Cone Point Grub Screws ISO 4027 (DIN 914)

Also known as a set screw, these headless types of screws have many uses. This particular type has a hex socket drive, and a cone point on the opposite end, as to ISO 4027 or DIN 914.

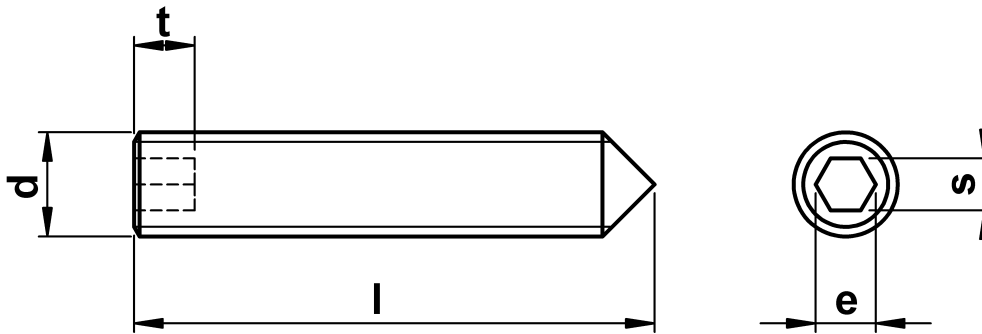

d	thread pitch	t	s	e
M2	0.40	0.8/1.7	0.9	1.003
M2.5	0.45	1.2/2.0	1.3	1.427
M3	0.50	1.2/2.0	1.5	1.730
M4	0.70	1.5/2.5	2	2.300
M5	0.80	2.0/3.0	2.5	2.870
M6	1.00	2.0/3.5	3	3.440
M8	1.25	3.0/5.0	4	4.580
M10	1.50	4.0/6.0	5	5.720
M12	1.75	4.8/8.0	6	6.860
M16	2.00	6.4/10.0	8	9.150
M20	2.50	8.0/12.0	10	11.430