




Phillips Csk Machine Screws ISO 7046 part 1 & 2 (DIN 965H)

A popular machine screw with a phillips drive. The countersunk head is typically used in conjunction with a countersunk hole providing a flush, snag free fit. These items are always fully threaded. Conforms to ISO 7046 parts 1 & 2 or DIN 965H. Typically found on consumer electronics and other small machinery where high torque fasteners are not necessary.

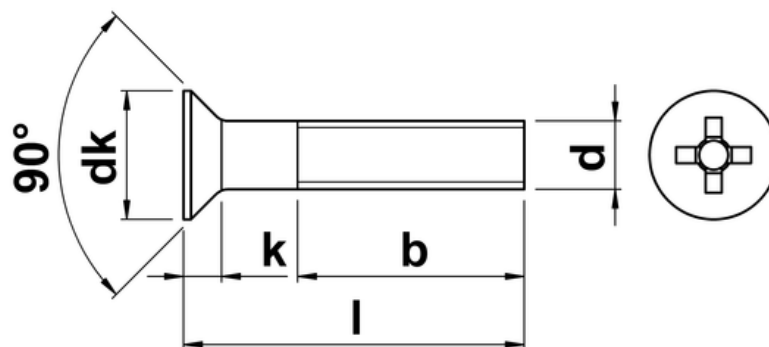

d	thread pitch	dk	k max.	b min.	s
M1.6	0.35	3.0	0.96	15	P 0
M2	0.40	3.8	1.20	16	P 1
M2.5	0.45	4.7	1.50	18	P 1
M3	0.50	5.6	1.65	19	P 1
M4	0.70	7.5	2.20	22	P 2
M5	0.80	9.2	2.50	25	P 2
M6	1.00	11.0	3.00	28	P 3
M8	1.25	14.5	4.00	34	P 4
M10	1.50	18.0	5.00	40	P4