




## UNC Socket Head Countersunk Screws ASME B18.3-2003

A countersunk headed screw conforming with ASME/ANSI B18.3, requiring a hex key (otherwise known as an Allen key) to fit. The countersunk head is typically used in conjunction with a countersunk hole providing a flush, snag free fit. Generally manufactured with a full thread, though occasionally some stock may include a partially threaded shank.

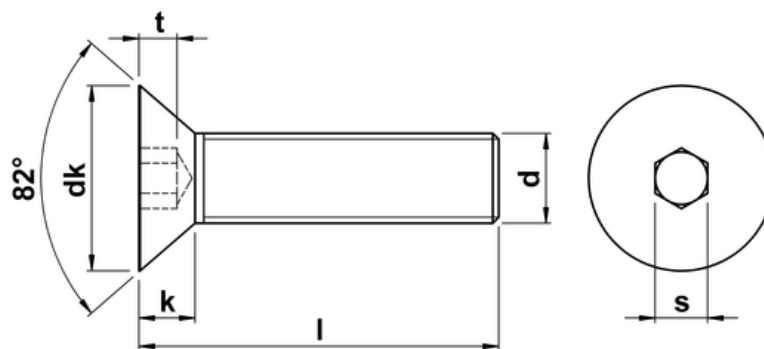

d	dk	k	s
1-64	0.137	0.043	0
2-56	0.162	0.051	1
3-48	0.187	0.059	1
4-40	0.212	0.067	1
5-40	0.237	0.075	2
6-32	0.262	0.083	2
8-32	0.312	0.100	2
10-24	0.362	0.116	2
12-24	0.412	0.132	3
1/4	0.477	0.153	3
5/16	0.597	0.191	4
3/8	0.717	0.230	4