




## Slotted Cheese Head Machine Screws ISO 1207 (DIN 84)

A machine screw with a traditional slot drive and a flat topped near cylindrical shaped head. Manufactured to ISO 1207 or DIN 84.

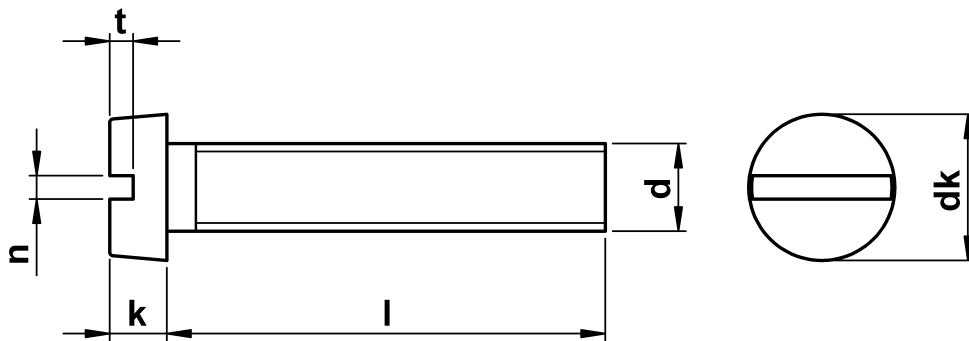

d	thread pitch	dk	k	n	t	s
<b>M1.6</b>	0.35	3.0	1.0	0.40	0.45	0.4X2.0
<b>M2</b>	0.40	3.8	1.3	0.50	0.60	0.5X3.0
<b>M2.5</b>	0.45	4.5	1.6	0.60	0.70	0.6X3.5
<b>M3</b>	0.50	5.5	2.0	0.80	0.85	0.8X4.0
<b>M3.5</b>	0.60	6.0	2.4	1.00	1.00	1.0X5.5
<b>M4</b>	0.70	7.0	2.6	1.20	1.10	1.2X7.0
<b>M5</b>	0.80	8.5	3.3	1.20	1.30	1.2X7.0
<b>M6</b>	1.00	10.0	3.9	1.60	1.60	1.6X9.0
<b>M8</b>	1.25	13.0	5.0	2.00	2.00	2.0X12.0
<b>M10</b>	1.50	16.0	6.0	2.50	2.40	2.5X14.0
<b>M12</b>	1.75	19.0	7.0	2.50	2.80	-