




Slotted Csk Machine Screws ISO 2009 (DIN 963)

A slot drive, countersunk headed screw, typically used in conjunction with a countersunk hole which provides a flush, snag free fit.

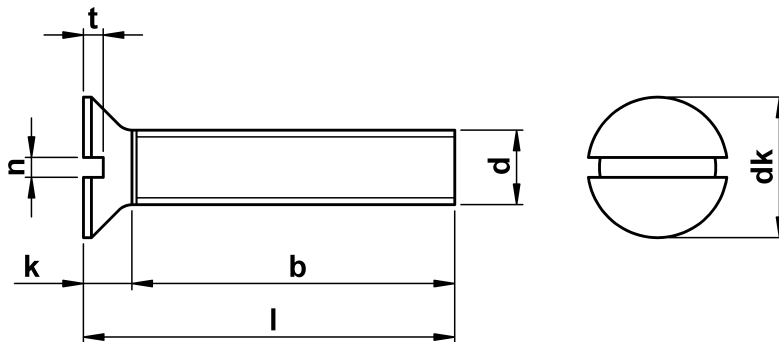

d	thread pitch	dk	k max.	n	t min.	b min.	s
M1.6	0.35	3.0	0.96	0.4	0.32	15	0.4X2.0
M2	0.40	3.8	1.20	0.5	0.40	16	0.5X3.0
M2.5	0.45	4.7	1.50	0.6	0.50	18	0.6X3.5
M3	0.50	5.6	1.65	0.8	0.60	19	0.8X4.0
M3.5	0.60	6.5	1.93	0.8	0.70	20	0.8X4.0
M4	0.70	7.5	2.20	1.0	0.80	22	1.0X5.5
M5	0.80	9.2	2.50	1.2	1.00	25	1.2X7.0
M6	1.00	11.0	3.00	1.6	1.20	28	1.6X9.0
M8	1.25	14.5	4.00	2.0	1.60	34	2.0X12.0
M10	1.50	18.0	5.00	2.5	2.00	40	2.5X14.0
M12	1.75	22.0	6.00	3.0	2.40	46	3.0X16
M16	2.00	29.0	8.00	4.0	3.20	-	-