




Slotted Raised Csk Machine Screws ISO 2010 (DIN 964)

A raised countersunk headed screw offering an attractive finish. Always fully threaded, and includes an old style slot drive for fitting.

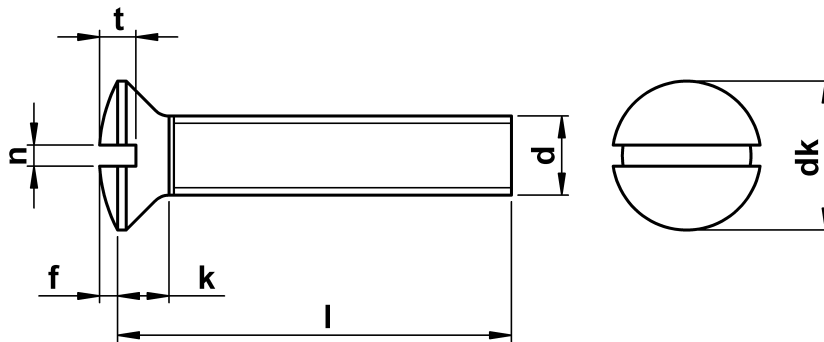

d	thread pitch	dk	f	k	n	t min.	b min.	s
M2	0.40	3.8	0.5	1.20	0.5	0.8	16	0.5X3.0
M2.5	0.45	4.7	0.60	1.50	0.6	1.0	18	0.6X3.5
M3	0.50	5.6	0.75	1.65	0.80	1.2	19	0.8X4.0
M4	0.70	7.5	1.00	2.20	1.0	1.6	22	1.0X5.5
M5	0.80	9.2	1.25	2.50	1.2	2.0	25	1.2X7.0
M6	1.00	11.0	1.50	3.00	1.6	2.4	28	1.6X9.0
M8	1.25	14.5	2.00	4.00	2.0	3.2	34	2.0X12.0
M10	1.50	18.0	2.50	5.00	2.5	4.0	40	2.5X14.0