



STICK FIT[®]



Ulti-Mate[®]

Stick-Fit[®] Deck Screws



**STICK
FIT[®]**

ACR[®]
ANTI-CAMOUT
RECESS



WEATHER
RESISTANT
ORGANIC
COATED

Patented **PSD[®]** recess featuring **STICK-FIT[®]** and **ACR[®]**
technology enabling stable, one-handed driving


Specially formulated weather resistant organic coating

LENGTH (L)	THREAD LENGTH (TL)
20	FULL
25	FULL
30	FULL
35	FULL
40	FULL
45	2/3 OF 'L'
50	2/3 OF 'L'
55	2/3 OF 'L'
60	2/3 OF 'L'
70	2/3 OF 'L'
80	2/3 OF 'L'
90	2/3 OF 'L'
100	2/3 OF 'L'
110	2/3 OF 'L'
120	2/3 OF 'L'

SCREW SIZE	DRIVE SIZE	A	H2	OD	ID	M	P
M4.0	PSD 1-2	8.00	4.14	4.00	2.86	5.01	2.37
M5.0	PSD 2-2	10.00	5.17	5.00	3.41	5.94	2.97

All dimensions in Millimeters.

- Patented **PSD®** recess featuring **STICK-FIT®** and **ACR®** technology enabling stable, one-handed driving.
- Self-countersinking reinforced double angle head.
- Heavy-duty core for added strength.
- High quality construction with weather resistant organic coating.
- Type-17 'slash' point to cut through the hardest timber. No predrilling required.
- **STICK-FIT®** Driver Bit inside every box of **Ulti-Mate®**

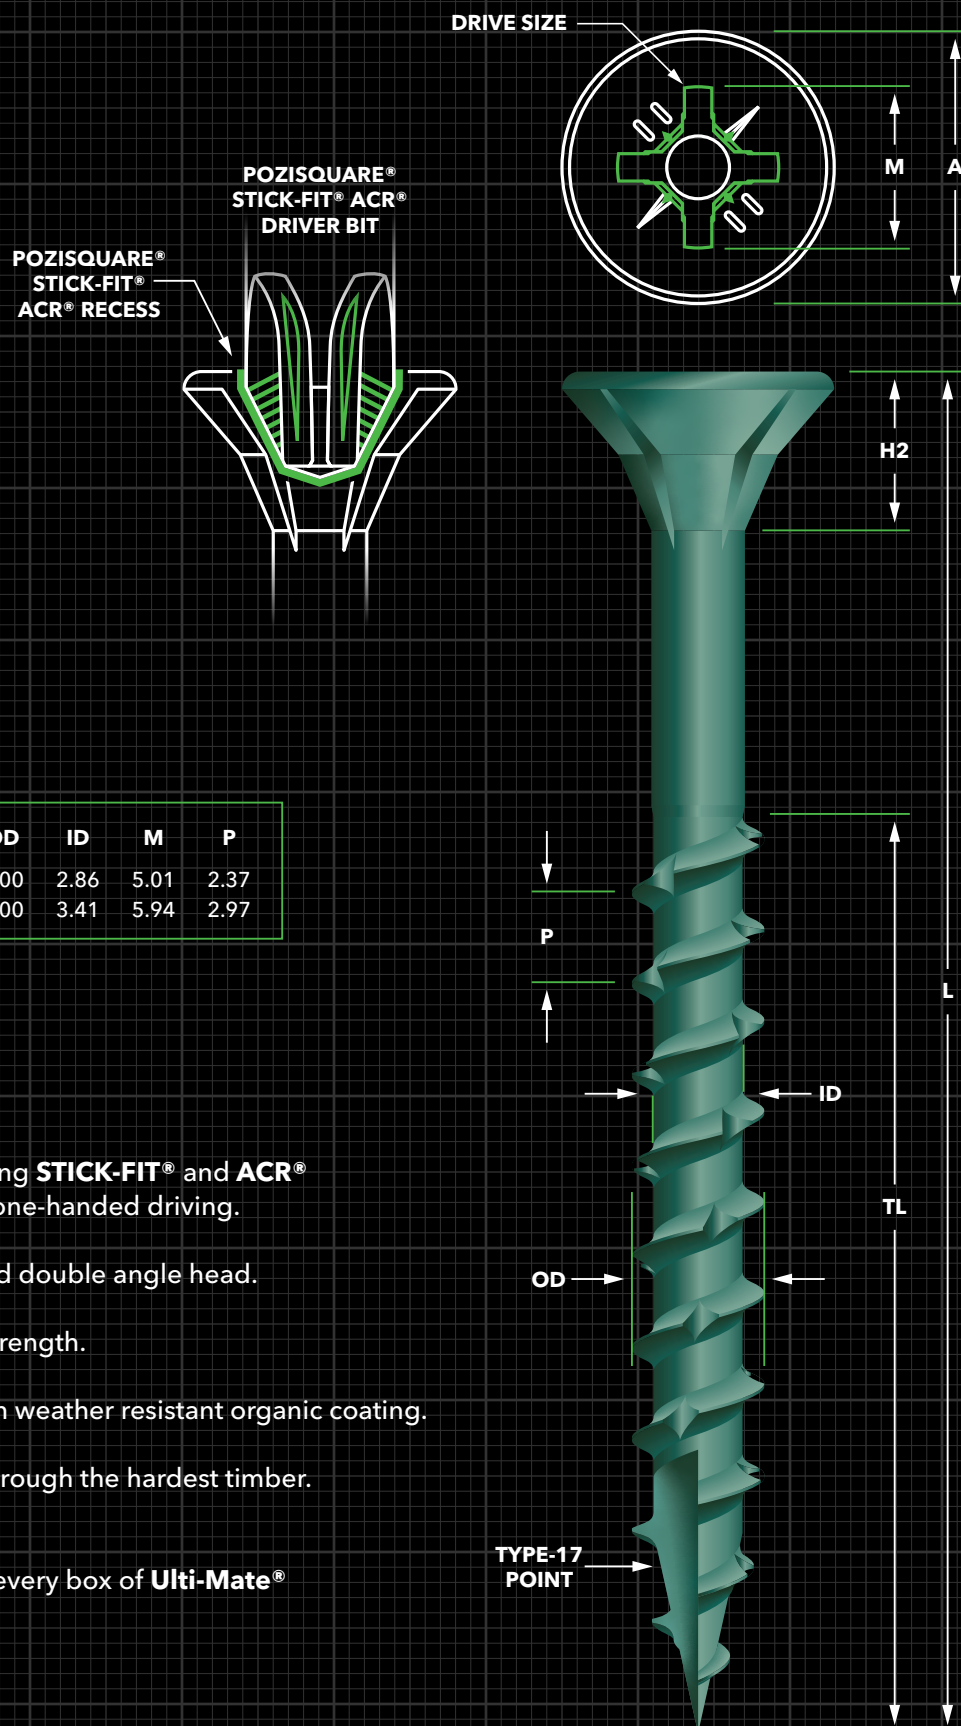

ULTI-MATE®, PSD®, STICK-FIT®, and ACR® are trademarks of The Phillips Screw Company. Patented and Patent Pending.