




STICK FIT[®]



Ulti-Mate[®]

Stick-Fit[®] Stainless Steel Screws

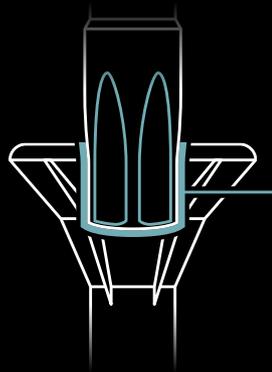

STICK FIT[®]

Patented **HEXSTIX[®]** recess featuring **STICK-FIT[®]** technology
enabling stable, one-handed driving

LENGTH (L)	THREAD LENGTH (TL)
20	FULL
25	FULL
30	FULL
35	FULL
40	FULL
50	2/3 OF 'L'
60	2/3 OF 'L'
70	2/3 OF 'L'
80	2/3 OF 'L'
90	2/3 OF 'L'
100	2/3 OF 'L'

SCREW SIZE	DRIVE SIZE	A	H2	OD	ID	M	P
M4.0	HS20	8.00	4.13	4.00	2.86	4.11	2.37
M5.0	HS20	9.00	5.13	5.00	3.41	4.11	2.97

All dimensions in Millimeters.

When thread length (TL) is 30mm or above, screw features a Type-17 point.

- ✳ Patented **HEXSTIX**® recess featuring **STICK-FIT**® technology enabling stable, one-handed driving.
- ✳ Self-countersinking reinforced double angle head.
- ✳ Heavy-duty core for added strength.
- ✳ Wax lubricant coating for low torque insertion.
- ✳ Type-17 'slash' point to cut through the hardest timber. No predrilling required.
- ✳ **STICK-FIT**® Driver Bit inside every box of **Ulti-Mate**®

